



15WHC (6")/20WHC (8")



- 電動百葉背板開關設計
- 安裝簡便，插上電源即可操作
- 前置安全蓋，安全美觀
- 抽出室內污染的空氣、濕氣、煙霧、微塵等，締造清新的空間。
- 設計、制造、測試符合IEC 60335-2-80標準，防水等級IPX2
- Electrically Operated Shutter
- Easy installation and operate through easily insert the power plug.
- Attached front cap for safety and better outlook .
- To exhaust the common pollutants, humidity, smoke, dust ...etc. Make the room fill with clean and fresh air.
- The design and the construction of the fan is manufactured and tested in compliance with the requirements of IEC 60335-2-80 , and the protection is IPX2.





型號 Model	A	B	C	D	E
15WHC	227mm	177mm	103.5mm	66mm	160mm
20WHC	290mm	239mm	105mm	75mm	215mm

型號 Model	電壓 Voltage	頻率 Frequency	耗電量 Power consumption	轉速 Speed(R/M)	風量 Air delivery (m³/min)	安裝孔尺寸 Installation hole dimension
15WHC	220V	50Hz	14W	1580	4.0	186-188mm
20WHC	220V	50Hz	20W	1250	7.4	247-250mm



挂牆式抽氣扇 Axial Fans

VIGOUR 6A/VIGOUR 9AC / 12AC

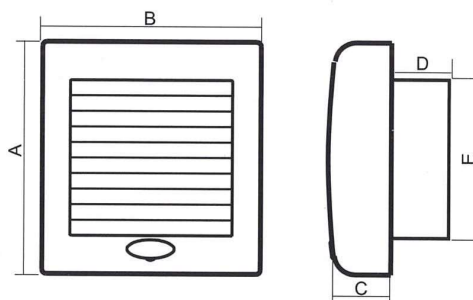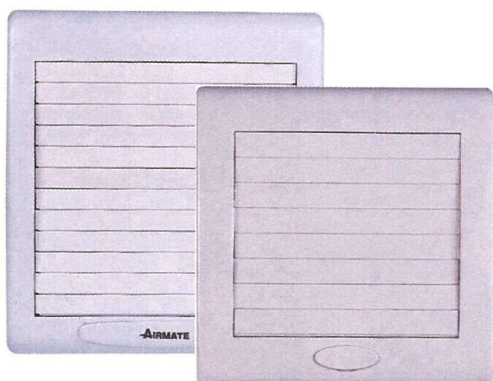

VIGOUR 9AC/12AC

- Electrical shutter
- Fixed window mounting kit
- Powerful exhaust/ventilation

- 電動百葉片面板
- 窗戶安裝
- 強力排風/進風

VIGOUR 6A

- Electrical shutter
- For wall mounted
- Can be window mounted with
- EURO W or EURO WS kit

- 電動百葉片面板
- 牆壁安裝
- 配合EURO W或EURO WS (窗甲組) 可以安裝在窗戶上

型號 Model	A	B	C	D	E
VIGOUR 6A	230	200	52	63	148
VIGOUR 9AC	318	280	125	33	248
VIGOUR 12AC	380	360	130	37	308

型號 Model	電壓 Voltage	頻率 Frequency	耗電量 Power consumption	噪音 Sound (dB)	風量 Air delivery (m³/min)	安裝孔尺寸 Installation hole dimension
VIGOUR 6A	220V	50Hz	29W	46	3.8	184-192mm
VIGOUR 9AC	220V	50Hz	36W	48	10.3	257-262mm
VIGOUR 12AC	220V	50Hz	79W	54	19.2	324-330mm

壁扇/吸頂扇系列 Wall and Cycle fan Types

FW2518/FW3012A/FW4012A 壁扇



FW2518 10寸

- 3 speed
- Oscillation & free neck
- 3 段風量
- 輕觸式俯仰調節

FW3012A/FW4012A 12寸/16寸

- 3 speed
- Oscillation & free neck
- Pull cord control oscillation
- 3 段風量
- 輕觸式俯仰調節
- 拉繩控制擺頭



TF-622B 16寸吸頂扇



- 3 speed
- Oscillation & free neck
- With speed regulator

- 3 段風量
- 360度旋轉送風
- 附開關盒





乾手機、浴室暖爐 Hand dryer & Heater

HD2401 乾手機



- HD2401: 2400W
- Wall mounted
- Hand free operation
- Adjustable sensor distance
- Over time safety control:
In all circumstance the dryer automatically switches off after 1 min. of continuous running
- Safety overheat cut-off protection
- IPX1 water drip-proof
- 2400W
- 掛牆式幹手機
- 自動感應式
- 金屬結構: -鋁外殼 -鐵底板
-鐵扇葉 -鋁出風口
- 可調較距離
- 超時保護: 在任何環境下幹手機可持續運行1分鐘之後自動斷電
- 過熱保護裝置
- IPX1



HD1888 乾手機



- 1850W
- 掛牆式幹手機
- 自動感應式
- 可調較距離
- 超時保護: 在任何環境下幹手機可持續運行1分鐘之後自動斷電
- 過熱保護裝置
- IPX1

- HD1888: 1850W
- Wall mounted
- Hand free operation
- Metallic structure:
 - Aluminum cover
 - Steel base
 - Steel propeller
 - Aluminum air outlet
- Adjustable sensor distance
- Over time safety control:
In all circumstance the dryer automatically switches off after 1 min. of continuous running
- Safety overheat cut-off protection
- IPX1 water drip-proof

