



POWERING
THE FUTURE



MK ESSENTIALS

DESIGNED FOR VALUE



DESIGNED FOR VALUE

Introducing MK Essentials.
A value range where quality counts.



DESIGNED FOR SMALLER BUDGETS

Essential switches and sockets to complement all interiors. With prices that are impossible to ignore.

Whatever your needs, MK Essentials offers a range of wiring devices, including 1 and 2 gang sockets with integrated USB ports, LED dimming, a hotel pack, as well as multiple switch and socket options.




DESIGNED FOR TRUSTED RELIABILITY

Essential 'fit and forget' solutions with the reliability and performance you'd expect. Backed by MK's 25 year quality guarantee.*

From the groundbreaking Multy Kontact Socket to the first modern light switch, we've been setting the standards in reliability for over a century. So you can specify, install and use MK Essentials with complete confidence.

Fully compliant with British Standards, MK Essentials is tested in our independently accredited UK testing facilities, and each product undergoes 100% electrical and visual testing at the point of manufacture.

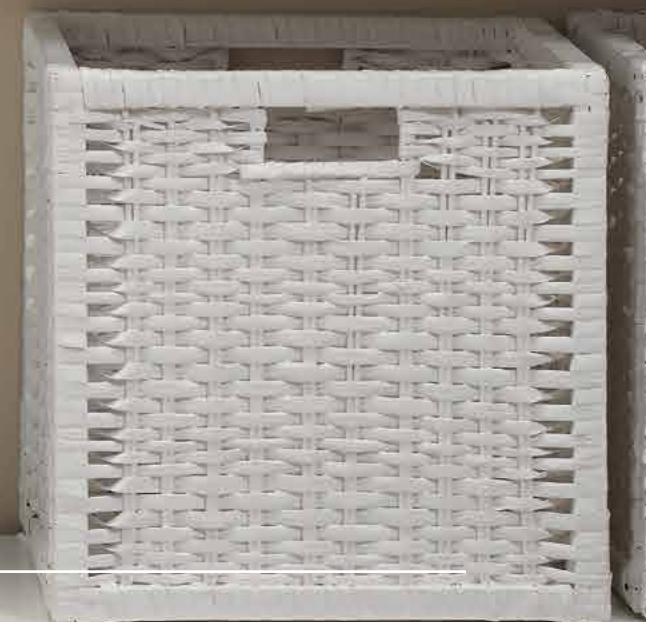



DESIGNED FOR INSTALLERS FIRST

Essential features like backed out and captive screws, ensure installation is both easy and convenient. A perfect fit every time.

Widely available and distributed nationally, every MK Essentials device comes with a screwless front plate. Simply clip on the surround to conceal any paint splatter or abrasions.



DESIGNED FOR GOOD LOOKS

Essential to meeting customers' expectations, with a screwless design and a high-gloss finish for a contemporary look and feel. Clean, simple and uncomplicated.

A smooth transition between device and surround prevents dust collection, whilst offering a slim understated appearance.

Ideal when redecorating, the clip-on surround can be removed and clipped back on again for a neat finish.



GET THE ESSENTIALS RIGHT WITH MK ESSENTIALS



MK Essentials offers a wide range of sockets, including 13A single and double pole sockets, switchsockets with and without neons, and those with integral USB ports, plus round pin 5A and 15A variations.



MK Essentials LED universal dimmers are available in 1 and 2 gang.



MK Essentials switches are available in 1, 2, 3 and 4 gang, with standard or wide rockers. Expand the MK Essentials range with grid frontplates and MK's Grid Plus modules. With over 100 modules to choose from there's a solution for all your project needs. Euro frontplates and modules are also available for data, voice and USB.

FIT AND FORGET

EASY INSTALLATION, SIMPLE DESIGN



HIGH GLOSS FINISH
Moulded in polycarbonate,
delivering a tough robust product

TOOL FREE CLIP-ON SURROUND
FIXING AND REMOVAL
Quick and secure, conceal any paint
splatter or abrasions, resulting in a
clean and simple design




BACKED BY MK'S 25 YEAR
GUARANTEE*
Quality comes as standard, with
the reliability and performance
you'd expect from MK.



TERMINAL MARKINGS
Clearly moulded markings on rear of
modules

CAPTIVE AND BACKED OUT
TERMINAL SCREWS
Pre-engaged in terminal for fast and
easy installation


DUAL EARTH TERMINALS
Offering total user safety for high
integrity earthing applications



Product Selector

Switchsocket Outlets

FLUSH
13 AMP



MV2757WHI
1 GANG SP WITH DUAL EARTH TERMINALS
MV2747WHI
2 GANG SP WITH DUAL EARTH TERMINALS
MV2657WHI
1 GANG SP WITH DUAL EARTH TERMINALS WITH NEON
MV2647WHI
2 GANG SP WITH DUAL EARTH TERMINALS WITH NEON

MOUNTING BOX
25MM
1 GANG 861ZIC
2 GANG 862ZIC
35MM
1 GANG 866ZIC (for extra wiring space)
2 GANG 886ZIC (for extra wiring space)
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 1363-2:2016+A1:2018


MOUNTING BOX
25MM
1 GANG 861ZIC
2 GANG 862ZIC
35MM
1 GANG 866ZIC (for extra wiring space)
2 GANG 886ZIC (for extra wiring space)
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 1363-2:2016+A1:2018

MOUNTING BOX
35MM
1 GANG 866ZIC
2 GANG 886ZIC
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 1363-2:2016+A1:2018

MOUNTING BOX
25MM
1 GANG 861ZIC
2 GANG 862ZIC
35MM
1 GANG 866ZIC (for extra wiring space)
2 GANG 886ZIC (for extra wiring space)
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 1363-2:2016+A1:2018

Socket Outlets

FLUSH
13 AMP



MV780WHI
1 GANG DP WITH DUAL EARTH TERMINALS
MV781WHI
2 GANG WITH DUAL EARTH TERMINALS

MOUNTING BOX
25MM
1 GANG 861ZIC
2 GANG 862ZIC
35MM
1 GANG 866ZIC (for extra wiring space)
2 GANG 886ZIC (for extra wiring space)
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 1363-2:2016+A1:2018

Switchsocket Outlets

ROUND PIN
FLUSH



MV2891WHI
1 GANG SP 5A
MV2893WHI
1 GANG DP 15A
MV2493WHI
1 GANG DP 15A WITH NEON

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
5A SWITCHSOCKETS
BS 546:1950
15A SWITCHSOCKET
BS 546:1950

Socket Outlets

ROUND PIN
FLUSH



MV771WHI
1 GANG 5A SHUTTERD
MV772WHI
1 GANG 15A SHUTTERD

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 546:1950

Connection Units

SWITCHED
13 AMP



MV1040WHI
DP WITH FUSE
MV1042WHI
DP WITH NEON AND FUSE
MV1041WHI
DP WITH FRONT FLEX OUTLET AND FUSE
MV1070WHI
DP WITH NEON, FRONT FLEX OUTLET AND FUSE

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:2016+A1:2018
FUSES COMPLY WITH
BS 1362:1973

Connection Units

UNSWITCHED
13, 25 AND 45 AMP



MV1031WHI
13A WITH FRONT FLEX OUTLET AND FUSE
MV1030WHI
13A WITH NEON, FRONT FLEX OUTLET AND FUSE
MV1080WHI
25A WITH FRONT FLEX OUTLET
MV1090WHI
45A COOKER CONNECTION UNIT

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:2016+A1:2018
FRONT FLEX OUTLET COMPLIES WITH
BS 5733:2010+A1:2014
FUSES COMPLY WITH
BS 1362:1973
COOKER CONNECTION UNIT
BS 5733:2010+A1:2014

USB Charging Sockets each capable of supporting 2.4A charge (total of 2.4A per socket)

Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671

Product Selector

Switchsocket Outlets

ROUND PIN
FLUSH



MV2891WHI
1 GANG SP 5A
MV2893WHI
1 GANG DP 15A
MV2493WHI
1 GANG DP 15A WITH NEON

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
5A SWITCHSOCKETS
BS 546:1950
15A SWITCHSOCKET
BS 546:1950

Socket Outlets

ROUND PIN
FLUSH



MV771WHI
1 GANG 5A SHUTTERD
MV772WHI
1 GANG 15A SHUTTERD

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 546:1950

Connection Units

SWITCHED
13 AMP



MV1040WHI
DP WITH FUSE
MV1042WHI
DP WITH NEON AND FUSE
MV1041WHI
DP WITH FRONT FLEX OUTLET AND FUSE
MV1070WHI
DP WITH NEON, FRONT FLEX OUTLET AND FUSE

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:2016+A1:2018
FUSES COMPLY WITH
BS 1362:1973

Connection Units

UNSWITCHED
13, 25 AND 45 AMP



MV1031WHI
13A WITH FRONT FLEX OUTLET AND FUSE
MV1030WHI
13A WITH NEON, FRONT FLEX OUTLET AND FUSE
MV1080WHI
25A WITH FRONT FLEX OUTLET
MV1090WHI
45A COOKER CONNECTION UNIT

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 1363-4:2016+A1:2018
FRONT FLEX OUTLET COMPLIES WITH
BS 5733:2010+A1:2014
FUSES COMPLY WITH
BS 1362:1973
COOKER CONNECTION UNIT
BS 5733:2010+A1:2014

USB Charging Sockets each capable of supporting 2.4A charge (total of 2.4A per socket)


Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671

Product Selector

High Current
DP Switches

20 AMP AND 32 AMP

45 AMP

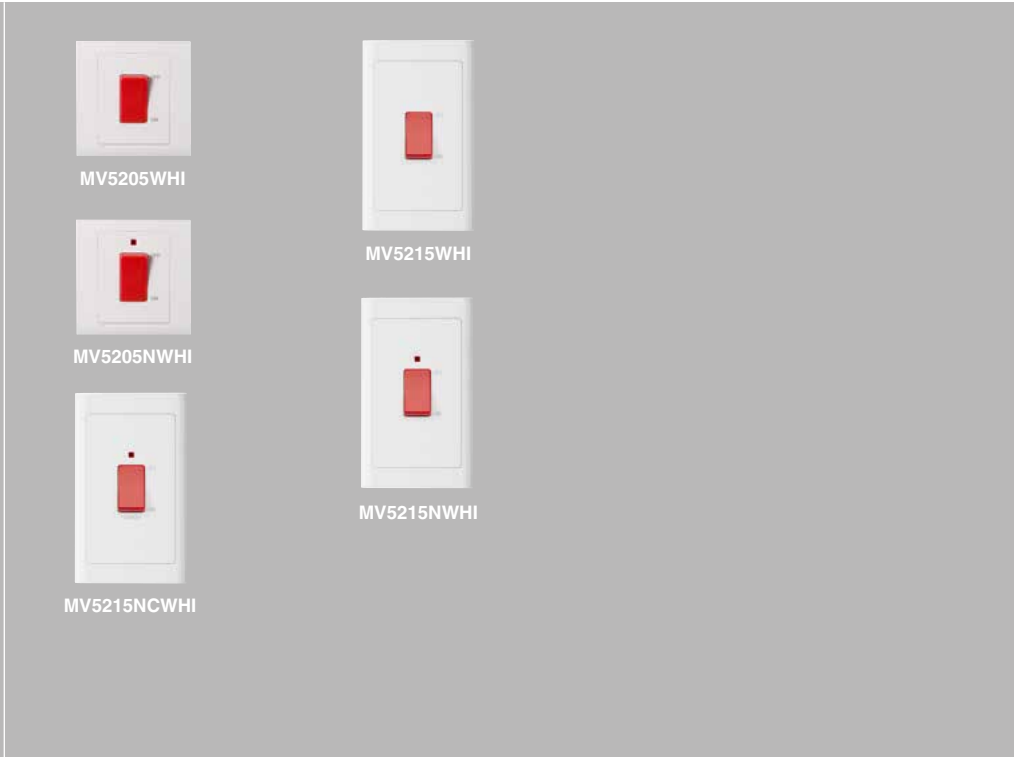

MV4787NWHI
1 GANG 20A DP WIDE ROCKER
SWITCH WITH NEON
MV8423WHWHI
1 GANG 20A DP SWITCH
WITH NEON AND MARKED
'WATER HEATER'
MV5105WHI
1 GANG 32A DP SWITCH
WITH NEON

MV8423WHI
1 GANG 20A DP SWITCH
WITH NEON
MV8423ACWHI
1 GANG 20A DP SWITCH
WITH NEON AND MARKED
'AIR CONDITIONER'

MV5205WHI
1 GANG DP SWITCH
MV5205NWHI
1 GANG DP SWITCH WITH NEON
MV5215NCWHI
2 GANG DP SWITCH WITH NEON
AND MARKED 'COOKER'

MV5215WHI
2 GANG DP SWITCH
MV5215NWHI
2 GANG DP SWITCH WITH NEON

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
886ZIC
DIMENSIONS
146 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018


MOUNTING BOX
35MM
886ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
1- 60.3mm, 2G: 120.6mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
886ZIC
DIMENSIONS
146 x 86mm
FIXING CENTRES
2G: 120.6mm
BS EN 60669-1:2018

Product Selector

Plateswitches

FLUSH
10 AMP

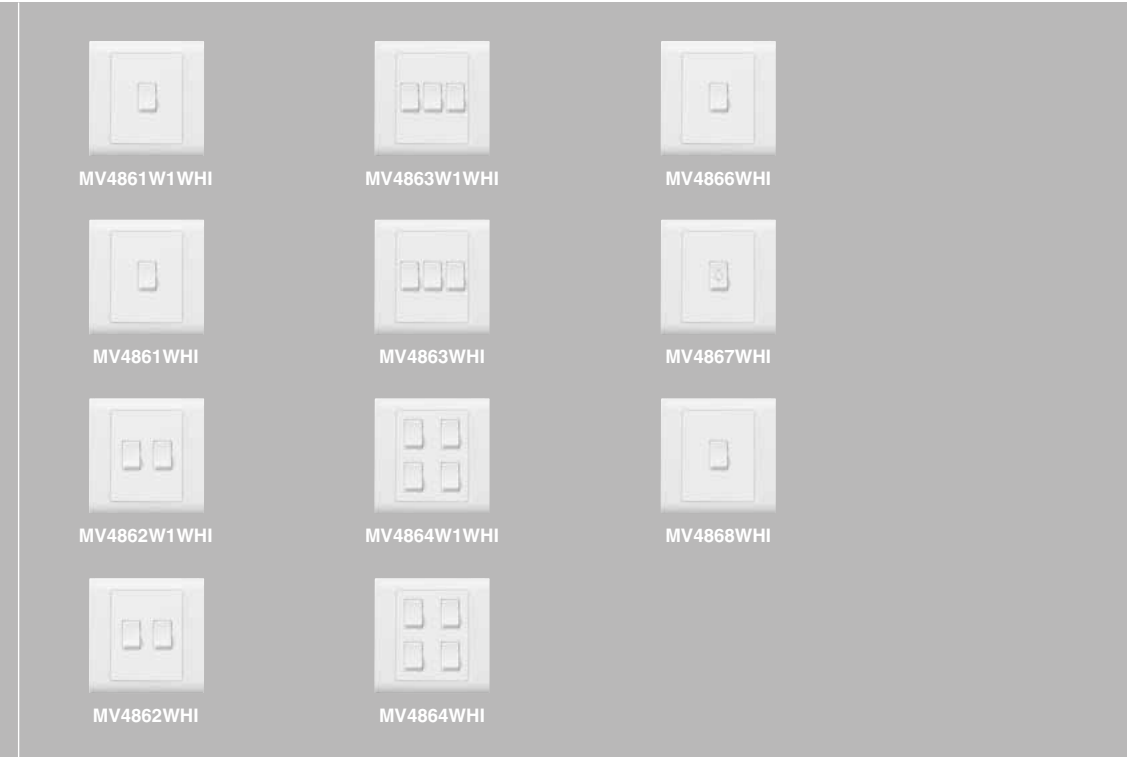

MV4861W1WHI
1 GANG SP ONE-WAY
MV4861WHI
1 GANG SP TWO-WAY
MV4862W1WHI
2 GANG SP ONE-WAY
MV4862WHI
2 GANG SP TWO-WAY


MV4863W1WHI
3 GANG SP ONE-WAY
MV4863WHI
3 GANG SP TWO-WAY
MV4864W1WHI
4 GANG SP ONE-WAY
MV4864WHI
4 GANG SP TWO-WAY

MV4866WHI
1 GANG SP INTERMEDIATE
MV4867WHI
1 GANG SP PUSH SWITCH
WITH BELL SYMBOL
MV4868WHI
1 GANG SP PUSH SWITCH

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
886ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
886ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
120.6mm
BS EN 60669-1:2018

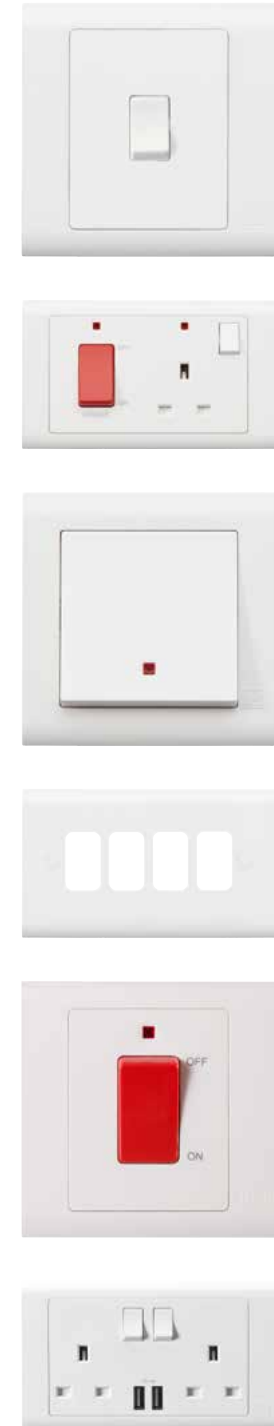

Product Selector

Wide Rocker
Switches

FLUSH
10 AMP

SWITCHES
20 AMP



MV4781W1WHI



MV4783W1WHI



MV4778BWHI



MV4787W1WHI



MV4789W1WHI



MV4790W1WHI



MV4781WHI



MV4783WHI



MV4786WHI



MV4787WHI



MV4789WHI



MV4790WHI



MV4782W1WHI



MV4784W1WHI



MV4786PWHI



MV4788W1WHI



MV4791WHI



MV4782WHI



MV4784WHI



MV4785WHI



MV4788WHI

MV4781W1WHI
1 GANG SP ONE-WAY
MV4781WHI
1 GANG SP TWO-WAY
MV4782W1WHI
2 GANG SP ONE-WAY
MV4782WHI
2 GANG SP TWO-WAY

MV4783W1WHI
3 GANG SP ONE-WAY
MV4783WHI
3 GANG SP TWO-WAY
MV4784W1WHI
4 GANG SP ONE-WAY
MV4784WHI
4 GANG SP TWO-WAY

MV4778BWHI
1 GANG SP PUSH SWITCH
WITH BELL SYMBOL
MV4786WHI
1 GANG SP PUSH SWITCH
MV4786PWHI
1 GANG SP PUSH SWITCH
MARKED 'PRESS'
MV4785WHI
1GANG INTERMEDIATE

MV4787W1WHI
1 GANG SP ONE-WAY
MV4787WHI
1 GANG SP TWO-WAY
MV4788W1WHI
2 GANG SP ONE-WAY
MV4788WHI
2 GANG SP TWO-WAY

MV4789W1WHI
3 GANG SP ONE-WAY
MV4789WHI
3 GANG SP TWO-WAY

MV4790W1WHI
4 GANG SP ONE-WAY
MV4790WHI
4 GANG SP TWO-WAY
MV4791WHI
1GANG INTERMEDIATE

MV1523WHI
1 GANG LED DIMMER
MV1524WHI
2 GANG LED DIMMER

MV5060WHI
DP SWITCH AND 13A
SWITCHSOCKET OUTLET
MV5061WHI
DP SWITCH AND 13A
SWITCHSOCKET OUTLET WITH
NEON

MV701WHI
SHAVER
SUPPLY UNIT
DUAL VOLTAGE
115/230V OUTPUT
(220/240V 50/60HZ INPUT)

MV4859WHI
1 GANG THREE-POLE FAN
ISOLATOR SWITCH

MOUNTING BOX
35MM
8662IC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
8662IC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
8662IC
DIMENSIONS
86 x 86mm
FIXING CENTRES
120.6mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
8662IC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
8662IC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
8662IC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-1:2018

MOUNTING BOX
35MM
1 GANG 8662IC
2 GANG 8862IC
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS EN 60669-2-1
IEC 60669-2-1

RC dimmer (trailing edge)
Voltage: 220-240V AC
Frequency: 50/60Hz
Rating:
Incandescent: 10-200W
Halogen lamp with electronic transformer:
35-200W
Dimmable LEDs: 6-100W

MOUNTING BOX
35MM
8862IC
DIMENSIONS
86 x 146mm
FIXING CENTRES
60.3mm
BS 4177:1992

MOUNTING BOX
35MM
8862IC
DIMENSIONS
146 x 86mm
FIXING CENTRES
60.3mm
BS EN 61558-2-5:1998

MOUNTING BOX
35MM
8662IC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS EN 60669-2-4:2005

Product Selector

Intelligent LED
Dimmer Switches

220V TO 240V A.C. 50HZ
LED, TUNGSTEN FILAMENT
AND LOW VOLTAGE
HALOGEN LIGHTING

Cooker Controls

MOULDED
FLUSH
45 AMP

Shaver/
Toothbrush
Supply Unit

Three Pole
Fan Isolator



MV1523WHI



MV5060WHI



MV701WHI



MV4859WHI



MV1524WHI



MV5061WHI

Product Selector

Blank
Plates

Hotel
Pack

Grid Plus
Frontplates

Euro Modular
Frontplates

Data, Voice
and TV


DATA
SOCKETS

TELEPHONE
OUTLET

TV
OUTLETS



MV3827WHI



MV3828WHI



MV4324WHI



MV4327WHI



MV4328WHI



MV4329WHI



MV3631WHI




MV3632WHI



MV3633WHI



MV3634WHI



MV181WHI



MV182WHI



MV184WHI



MV428WHI



MV429WHI



MV417WHI



MV418WHI



MV422WHI



MV427WHI



MV3520WHI



MV3521WHI



MV3522WHI



MV3523WHI



MV3553WHI



MV3529WHI

MV3827WHI
1 GANG BLANK PLATE
MV3828WHI
2 GANG BLANK PLATE

MV4324WHI
KEY CARD SWITCH 50HZ/60HZ
MV4327WHI
2 GANG 10A SERVICE AND DO NOT DISTURB SWITCH WITH INDICATOR
MV4328WHI
1 GANG TWO-WAY BELL SWITCH WITH INDICATOR
MV4329WHI
2 GANG SHUTTER SWITCH FOR ROLLER BLINDS

MV3631WHI
1 MODULE FRONT PLATE
MV3632WHI
2 MODULE FRONT PLATE
MV3633WHI
3 MODULE FRONT PLATE
MV3634WHI
4 MODULE FRONT PLATE

MV181WHI
1 GANG FRONTPLATE ONE MODULE APERTURE SIZE 25 X 50MM
MV182WHI
1 GANG FRONTPLATE TWO MODULE APERTURE SIZE 50 X 50MM
MV184WHI
2 GANG FRONTPLATE FOUR MODULE APERTURE SIZE 100 X 50MM

MV428WHI
1 GANG RJ45 CAT6 DATA SOCKET
MV429WHI
1 GANG DOUBLE RJ45 CAT6 DATA SOCKET

MV417WHI
1 GANG RJ11 4 WIRE TELEPHONE SOCKET
MV418WHI
1 GANG DOUBLE RJ11 4 WIRE TELEPHONE SOCKET
MV422WHI
1 GANG BT TELEPHONE SOCKET (MASTER)
MV427WHI
1 GANG BT TELEPHONE SOCKET (SECONDARY)

MV3520WHI
1 GANG SINGLE OUTLET MALE NON-ISOLATED TV SOCKET
MV3521WHI
1 GANG SINGLE FEMALE NON-ISOLATED TV SOCKET
MV3522WHI
1 GANG SINGLE OUTLET ISOLATED TV SOCKET
MV3523WHI
TWIN TV/FM DIPLEXER

MV3553WHI
1 GANG TRIPLE OUTLET TV-FM-SAT TRIPLEXER SOCKET
MV3529WHI
1 GANG SINGLE OUTLET CABLE TV 'F' TYPE CONNECTOR

MOUNTING BOX
25MM
1 GANG 861ZIC
2 GANG 862ZIC
35MM
1 GANG 866ZIC (for extra wiring space)
2 GANG 886ZIC (for extra wiring space)
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 5733:2010+A1:2014

MOUNTING BOX
35MM
866ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
KEY CARD SWITCH
BS EN 60669-2-1:2004
BS EN 60669-2-1:2004

MOUNTING BOX
25MM
1 GANG 861ZIC
2 GANG 862ZIC
35MM
1 GANG 866ZIC (for extra wiring space)
2 GANG 886ZIC (for extra wiring space)
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 5733:2010+A1:2014

MOUNTING BOX
25MM
1 GANG 861ZIC
2 GANG 862ZIC
35MM
1 GANG 866ZIC (for extra wiring space)
2 GANG 886ZIC (for extra wiring space)
DIMENSIONS
1G: 86 x 86mm
2G: 86 x 146mm
FIXING CENTRES
1G: 60.3mm, 2G: 120.6mm
BS 5733:2010+A1:2014

MOUNTING BOX
46MM
877ZIC
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
IEC 1180
EN 50173
TIA 568
EN41003

MOUNTING BOX
25MM
861ZIC
35MM
866ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
MV417WHI & MV418WHI
FCC68
EN41003

MV422WHI & MV427WHI
BS6312

MOUNTING BOX
25MM
861ZIC
35MM
866ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 5733:2010+A1:2014

MOUNTING BOX
25MM
861ZIC
35MM
866ZIC (for extra wiring space)
DIMENSIONS
86 x 86mm
FIXING CENTRES
60.3mm
BS 5733:2010+A1:2014

Product Selector

Euro Power Modules

Euro Datacom Modules

		RJ11/12	RJ45 CAT 6A	RJ45 CAT 6	RJ45 CAT 5e	TELEPHONE	TV CO-AXIAL OUTLETS FOR DIGITAL TV SCREENED NON ISOLATED		HDMI	AUDIO	BLANKS
 K5830WHI  K5831WHI  K5832WHI  K5833WHI  K5834WHI  K5837WHI	 K5887WHI  K5887BLK	 K5841WHI  K5841SWHI	 K5846WHI  K5846SBLK  K5864WHI	 K5844WHI  K5845WHI  K5845BLK	 K5820WHI  K5821WHI  K5821BLK	 K5850WHI  K5851WHI  K5855WHI  K5850BLK  K5851BLK  K5855BLK	 K5852WHI  K5852DABWHI  K5853WHI  K5853DABWHI  K5854DABWHI	 K5807WHI	 K5805WHI  K5806WHI	 K180WHI  K188WHI  K186WHI  K188BLK  K186BLK	

K5830WHI K5830BLK UK 1 GANG EURO 2 MODULE 13A 250V SHUTTERED	K5833WHI K5833BLK UK 1 GANG EURO 2 MODULE 5A 250V SHUTTERED
K5831WHI K5831BLK GERMAN 2P+E 16A 250V SHUTTERED EURO 2 MODULE (NON UK)	K5834WHI K5834BLK FRENCH/BELGIAN 2P+E 16A 250V SHUTTERED EURO 2 MODULE (NON UK)
K5832WHI K5832BLK AMERICAN 2P+E 15A 127V SHUTTERED EURO 2 MODULE (NON UK)	K5837WHI K5837BLK USB CHARGING MODULE EURO 2 MODULE

K5887WHI	K5841WHI
K5887BLK	RJ45 CAT 6A
RJ11/12	ONE MODULE
ONE MODULE	25 X 50MM
25 X 50MM	K5841SWHI
	RJ45 CAT6A SCREENED
	ONE MODULE
	25 X 50MM

K5846WHI
K5846BLK
 RJ45 CAT 6
 ONE MODULE
 25 X 50MM

K5846SWHI
K5846SBLK
 RJ45 CAT 6 SCREENED
 ONE MODULE
 25 X 50MM

K5864WHI
 RJ45 CAT 6 ANGLED
 ONE MODULE
 25 X 50MM

K5820WHI
K5820BLK
TELEPHONE MASTER
ONE MODULE
25 X 50MM

K5821WHI
K5821BLK
TELEPHONE
SECONDARY
ONE MODULE
25 X 50MM

K5850WHI
K5850BLK
SINGLE OUTLET (IEC MALE)
ONE MODULE 25 X 50MM

K5851WHI
K5851BLK
SINGLE OUTLET
(IEC FEMALE)
ONE MODULE 25 X 50MM

K5855WHI
K5855BLK
SINGLE F-TYPE SATELLITE
SOCKET
ONE MODULE 25 X 50MM

K5852WHI
K5852BLK
TWIN OUTLET
TV/FM DIPLEXER
TWO MODULE 50 X 50MM
(IRELAND ONLY)

K5852DABWHI
K5852DABBLK
TWIN OUTLET TV-FM/DAB
DIPLEXER
TWO MODULE 50 X 50MM

K5853WHI
K5853BLK
TRIPLE OUTLET
TV/FM/SATELLITE TRIPLEX
TWO MODULE 50 X 50MM
(IRELAND ONLY)

K5853DABWHI
K5853DABBLK
TRIPLE OUTLET
TV-FM/DAB-SAT TRIPLEXER
TWO MODULE 50 X 50MM

K5854DABWHI
K5854DABBLK
QUAD OUTLET
TV-FM/DAB-2XSAT
TWO MODULE 50 X 50MM

K5807WHI
K5807BLK
FEMALE HDMI OUTLET

K5807 FEMALE HDMI Outlet is
HDMI 1.1, 1.2,
1.3 and 1.4 compatible, HDCP
compliant.

DATA RATE
Up to 2.25 Gbps

SCAN
Up to 1080p/1920x1200

INPUT CONNECTOR
1 x HDMI Female (Type A)

OUTPUT CONNECTOR
1 x HDMI Female (Type A)

Supports high resolution input

PC
VGA, SVGA, XWGA (1280x1024)
and UXGA (1600x1200,
1920x1200)

HDTV
480p, 720p, 1080i and 1080p

HDMI input cable should be no larger
than 20m.

DIMENSIONS
50 x 50 x 20mm

K5805WHI
K5805BLK
AUDIO BINDING POST
SET FOR SINGLE LOUD
SPEAKER

K5806WHI
K5806BLK
RCA TO SCREW
TERMINATION SET
1 RED AND 1 BLACK

K180WHI
TWO MODULE
BLANK 50 X 50MM

K188WHI
K188BLK
ONE MODULE
BLANK 25 X 50MM

K186WHI
K186BLK
HALF MODULE
BLANK 12.5 X 50MM

K5830	K5833
MOUNTING BOX	MOUNTING BOX
35mm minimum	35mm minimum
46mm (for extra wiring space)	46mm (for extra wiring space)
DIMENSIONS	DIMENSIONS
50 x 50mm	50 x 50mm
BS 1363 Pt2:1995	BS 546:1950
K5831	K5834
MOUNTING BOX	MOUNTING BOX
46mm	46mm
DIMENSIONS	DIMENSIONS
50 x 50mm	50 x 50mm
IEC 60884-1:2006	NF C61-314
K5832	K5837
MOUNTING BOX	MOUNTING BOX
35mm	35mm, 46mm (for extra wiring space)
46mm (for extra wiring space)	
DIMENSIONS	DIMENSIONS
50 x 50mm	50 x 50mm
SASO 2204:2003	USB charging sockets, each capable of supporting 2A charge (total of 2A).

Suitable for both RJ11
and RJ12 jacks
RJ11: 4 wire
RJ12: 6 wire

MOUNTING BOXES
Minimum box depth 25mm
FCC68
EN 41003

Cat 6A performance
Suitable for both 568A
and 568B wiring schemes.

MOUNTING BOXES
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Cat 6 performance.
Suitable for both 568A
and 568B wiring schemes.

MOUNTING BOXES
Minimum Box Depth 35mm
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

Enhanced Cat 5 performance
Suitable for both 568A and
568B wiring schemes.
Supplied with cable tie
and cable anchors to secure wires
in the connectors.

MOUNTING BOXES
Minimum box depth
25mm standard
ISO/IEC 11801
EN 50173
TIA 568
EN 41003

MOUNTING BOXES
Minimum depth 25mm
BS 6312 Pt 2

These products are fully compatible with La

PERFORMANCE
SINGLE OUTLETS
TV/FM Iec Male Or Female
DC-950MHz
SAT F-TYPE
DC-1.75GHz

TV/FM/SAT PRODUCTS	
Outlet:	Diplexer
TV:	5-65MHz 470-862MHz
FM/DAB:	87.5-108MHz
SAT:	N/A
Outlet:	Triplexer
TV:	5-65MHz 470-862MHz
FM:	87.5-108MHz
SAT1:	950-2300MHz

TV/FM/DAB/SAT PRODUCTS FOR DIGITAL RADIO	
Outlet: TV:	Duplexer 5-65MHz 470-862MHz
FM/DAB: SAT OR SAT1:	87.5-230MHz N/A
Outlet: SAT2: TV:	Triplexer 5-65MHz 470-862MHz
FM: SAT1: SAT2:	87.5-230MHz 950-2300MHz 5-2300MHz

DIMENSIONS
50 x 25 x 28mm

BS 5733:2010 where applicable

**Mains operated products and extra low voltage modules must not be installed within the same frontplate.
Refer to BS 7671 IET Wiring Regulations for details.**

Product Selector

Euro Multimedia Modules

TV CO-AXIAL OUTLETS FOR DIGITAL TV SCREENED
NON ISOLATED

HDMI

AUDIO

BLANKS

B suffix on the list number denotes black inserts

B suffix on the list number denotes black inserts

B suffix on the list number denotes black inserts

B suffix on the list number denotes black inserts

Switch Modules
20 Amp

Printed Modules with and without Neon

1 WAY
RED ROCKER DP
20 AMP

1 WAY
BOILER DP
20 AMP

1 WAY
BOILER
NEON DP
20 AMP

1 WAY
DISHWASHER DP
20 AMP

1 WAY
DISHWASHER
NEON DP
20 AMP

1 WAY
COOKER HOOD DP
20 AMP

1 WAY
COOKER HOOD
NEON DP
20 AMP

1 WAY
FAN DP
20 AMP

1 WAY FAN
NEON DP
20 AMP

1 WAY
FRIDGE DP
20 AMP



FINISHES

WHITE

K4896RED 10

K4896BRWHI 1

K4896NBRWHI 1

K4896DWWHI 1

K4896NDWWHI 1

K4896CHWHI 1

K4896NCHWHI 1

K4896FNWHI 1

K4896NFNWHI 1

K4896FGWHI 1

BLACK

K4896REDB 1

K4896BRBLK 1

K4896NBRBLK 1

K4896DWBLK 1

K4896NDWBLK 1

K4896CHBLK 1

K4896NCHBLK 1

K4896FNBLK 1

K4896NFNBLK 1

K4896FGBLK 1

These switches do NOT have
to be derated when used with
fluorescent or inductive loads.
BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

Printed Modules with and without Neon

1 WAY
FRIDGE
NEON DP
20 AMP

1 WAY
FREEZER DP
20 AMP

1 WAY
FREEZER
NEON DP
20 AMP

1 WAY
FRIDGE
FREEZER DP
20 AMP

1 WAY
FRIDGE FREEZER
NEON DP
20 AMP

1 WAY
WASTE
DISPOSAL DP
20 AMP

1 WAY
WASTE DISPOSAL
NEON DP
20 AMP

1 WAY
WASHING
MACHINE DP
20 AMP

1 WAY
WASHING
MACHINE
NEON DP
20 AMP

1 WAY
TUMBLE
DRYER DP
20 AMP

1 WAY
TUMBLE DRYER
NEON DP
20 AMP



FINISHES

WHITE

K4896NFGWHI 1

K4896FZWHI 1

K4896NFZWHI 1

K4896FFWHI 1

K4896NFFWHI 1

K4896WDWHI 1

K4896NWDWHI 1

K4896WMWHI 1

K4896NWMWHI 1

K4896TDWHI 1

K4896NTDWHI 1

BLACK

K4896NFGBLK 1

K4896FZBLK 1

K4896NFZBLK 1

K4896FFBLK 1

K4896NFFBLK 1

K4896WDBLK 1

K4896NWDBLK 1

K4896WMBLK 1

K4896NWMBLK 1

K4896TDBLK 1

K4896NTDBLK 1

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

Printed Modules with and without Neon

1 WAY
WASHER DRYER DP
20 AMP

1 WAY
WASHER DRYER
NEON DP
20 AMP

1 WAY
MICROWAVE DP
20 AMP

1 WAY
MICROWAVE
NEON DP
20 AMP

1 WAY
HEATER DP
20 AMP



FINISHES					
WHITE	K4896WDRWHI 1	K4896NDRWHI 1	K4896MWWHI 1	K4896NMWWHI 1	K4896HRWHI 1
BLACK	K4896WDRBLK 1	K4896NDRBLK 1	K4896MWBLK 1	K4896NMWBLK 1	K4896HRBLK 1

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

1 WAY
HEATER
NEON DP
20 AMP

1 WAY
OVEN DP
20 AMP

1 WAY
OVEN NEON DP
20 AMP

1 WAY
HOB DP
20 AMP

1 WAY
HOB NEON DP
20 AMP

1 WAY
IMMERSION
HEATER DP
20 AMP



K4896NHRWHI 1	K4896OVWHI 1	K4896NOVWHI 1	K4896HBWHI 1	K4896NHBWHI 1	K4896IHWHI 1
K4896NHRBLK 1	K4896OVBLK 1	K4896NOVBLK 1	K4896HDBLK 1	K4896NHDBLK 1	K4896IHBLK 1

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

Printed Modules with and without Neon

1 WAY
IMMERSION
HEATER NEON DP
20 AMP

1 WAY
PLINTH HEATER DP
20 AMP

1 WAY
PLINTH HEATER
NEON DP
20 AMP

1 WAY
WORKTOP
LIGHTING DP
20 AMP

1 WAY
WORKTOP
LIGHTING
NEON DP
20 AMP



FINISHES					
WHITE	K4896NIHWHI 1	K4896PHWHI 1	K4896NPHWHI 1	K4896WLWHI 1	K4896NWLWHI 1
BLACK		K4896PHBLK 1		K4896WLBLK 1	K4896NWLBLK 1

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

1 WAY
WINE COOLER DP
20 AMP

1 WAY
WINE COOLER
NEON DP
20 AMP

1 WAY
WARMING
DRAWER DP
20 AMP

1 WAY
WARMING
DRAWER NEON DP
20 AMP

1 WAY
COFFEE
MACHINE DP
20 AMP

1 WAY
COFFEE MACHINE
NEON DP
20 AMP



K4896WCWHI 1	K4896NWCWHI 1	K4896WDAWHI 1	K4896NWDAWHI 1	K4896CMWHI 1	K4896NCMWHI 1
K4896WCBLK 1	K4896NWCBLK 1	K4896WDABLK 1	K4896NWDABLK 1	K4896CMBLK 1	K4896NCMBLK 1

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

BS EN 60669-1:2018

Secret Key Switch Modules

INTERMEDIATE
SECRET KEY
SWITCH
20 AMP

2 WAY
SECRET KEY
SWITCH SP
20 AMP

2 WAY
SECRET KEY
SWITCH MARKED
'EMG LTG TEST' SP
20 AMP

1 WAY
SECRET KEY
SWITCH DP
20 AMP

EMERGENCY
LIGHTING DP
20 AMP



FINISHES

WHITE	K4894WHI 10	K4898WHI 10	K4898ELWHI 10	K4917WHI 10	K4917ELWHI 10
BLACK	K4894BLK 1	K4898BLK 1	K4898ELBLK 1	K4917BLK 1	

These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:2018 Key (3405ZIC) is supplied.

These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:2018 Key (3405ZIC) is supplied.

These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:2018 Key (3405ZIC) is supplied.

These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:2018 Key (3405ZIC) is supplied.

These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:2018 Key (3405ZIC) is supplied.

Indicator Unit Modules

2 WAY
SECRET KEY
SWITCH (BIASED
1 WAY) SP
20 AMP

200-250V
NEON

200-250V
NEON

200-250V
FLUORESCENT

21-36V
FILAMENT

21-36V
FILAMENT



K4918WHI 10	K4889RED 10	K4889AMB 10	K4889GRN 10	K4836RED 10	K4836AMB 10
K4918BLK 10	K4889REDB 1				

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

B suffix on the list number denotes black inserts

Will Operate On Both A.C. And D.C

Indicator Unit Modules

21-36V
FILAMENT

Dimmer Switch Modules

TUNGSTEN FILAMENT AND LOW VOLTAGE LIGHTING

40W/VA-220W/
180VA MAX
230V A.C., 50HZ
1 MODULE

60W/VA-400W/
320VA MAX
230V A.C., 50HZ
2 MODULE

0-10V/1-10V
FLUORESCENT
CONTROLLER
1 MODULE

40-220W/180VA/
4-70W
LED INTELLIGENT
DIMMER
1 MODULE



FINISHES

WHITE	K4836GRN 10	K4501WHILV 1	K4500WHILV 1	K4499WHI 1	K4511WHILV 1
BLACK		K4501BLKLV 1	K4500BLKLV 1	K4499BLK 1	K4511BLKLV 1

BS 5733:2010

Will Operate On Both A.C. And D.C

These dimmers employ the latest microcontroller based circuitry to provide electronic soft start and overload protection. Suitable for use with good quality electronic or wire wound transformers. Can also be used with good quality mains voltage halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability. K4501WHI/BLK Max. No. of low voltage T/F's – 3 K4500WHI/BLK Max. No. of low voltage T/F's – 5 Not suitable for fluorescent loads. All dimmers have push on – push off, 2 way switches, integral with rotary control. NOTE Refer to technical section for derating. Conform to BS EN 60669-2-1 and BS EN 55015

MK Fluorescent Grid Dimmers are low voltage controllers for connection to 1-10V controllable ballasts.

K4511WHILV 1 Module 2 Way 40-220W/180VA/4-70W LED Intelligent Dimmer. K4511BLKLV 1 Module 2 Way 40-220W/180VA/4-70W LED Intelligent Dimmer.

Accessory Modules

SINGLE TV
CO-AXIAL
OUTLET
NON-ISOLATED

SINGLE TV
CO-AXIAL
OUTLET
ISOLATED

200-250V A.C.
BUZZER UNIT

21-36V A.C.
BUZZER UNIT

16A
CORD
OUTLET

13A
FUSE UNIT

13A
FUSE UNIT WITH
TAMPERPROOF
SCREW



K4520WHI 10	K4521WHI 10	K4000WHI 10	K4001WHI 10	K4886WHI 10	K4890WHI 10	K4890KOWHI 10
K4520BLK 10	K4521BLK 10			K4886BLK 10	K4890BLK 10	K4890KOBK 10

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V. BS 3041:1977 IEC 169-2:1965 BS 5733:2010 where applicable.

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V. BS 3041:1977 IEC 169-2:1965 BS 5733:2010 where applicable.

SOUND OUTPUT LEVEL Av 61 db @ 15 feet. BS 5733:2010

SOUND OUTPUT LEVEL Av 61 db @ 15 feet. BS 5733:2010

Complete with 3 pairs of terminals. The supply terminals are suitable for up to 2 x 2.5mm² or 1 x 4mm² solid conductors. The load terminals are suitable for one 1.5mm² flexible cord. A cord grip is also fitted. BS 5733:2010

Fuse carrier comes with 13A cartridge fuse link to BS 1362. BS 5733:2010

Fuse carrier comes with 13A cartridge fuse link to BS 1362. BS 5733:2010 Key (3405ZIC) is supplied.

UK

The Arnold Centre, Paycocke Road, Basildon,
Essex, SS14 3EA, United Kingdom

Customer Service Tel +44 (0)1268 563404

Customer Service Fax +44 (0)1268 563405

E-mail mkorderenquiries@honeywell.com

Technical

Tech Helpline Tel +44 (0)1268 563720

Tech E-mail mk.technical@honeywell.com

Ireland

Sales Tel +353 1 429 6530

Sales Fax +353 1 429 6501

E-mail mkirelandorders@honeywell.com

www.mkelectric.co.uk

