PHILIPS

Lighting



Essential SmartBright LED Downlight

DN027B G3 LED20/CW 19W 220-240V D200 RD

Essential SmartBright LED Downlight, 19 W, 2100 lm, 6500 K, Beam angle 110°, White

Essential SmartBright G2 LED Downlight is value for money product with high efficacy, good quality and reliability. It offers multiple configurations from 300lm to 2000lm output, to replace conventional downlight. It can be used for shopping mall, retail store, residential and office. It's an ideal product family to distribute in trade market.

Product data

General Information	
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Lighting Technology	LED
Warranty period	3 years

Light Technical	
Luminous Flux	2,100 lm
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	110.00 lm/W
Color rendering index (CRI)	80
Light source color	865 cool daylight
Optic type	Beam angle 110°
Luminaire light beam spread	110°

Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Input Frequency	50 or 60 Hz
Inrush current	4.92 A
Inrush time	0.115 ms
Power Consumption	19 W
Power Factor (Fraction)	0.9
Cable	Cable 0.2 m without plug
Number of products on MCB of 16 A type B	55
Suitable for random switching	No
Protection class IEC	Safety class II

Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)

Essential SmartBright LED Downlight

Constant light output	No

Mechanical and Housing

Housing Material	Metal–Plastic
Reflector material	-
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Steel
Housing Color	White
Optical cover finish	Matte
Overall length	225 mm
Overall width	225 mm
Overall height	45 mm
Overall diameter	225 mm
Dimensions (Height x Width x Depth)	45 x 225 x 225 mm
Ingress protection code	IP20/40 [Finger-protected;Wire-protected]
Mech. impact protection code	IK03 [0.3 J]
Net Weight (Piece)	0.365 kg

Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
EU RoHS compliant	Yes
Ambient temperature range	-20 to +40 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(IEC6500K, 0.313, 0.337) < 5SDCM
Power consumption tolerance	+/-10%


Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	0.012 %
Median useful life L70B50	30,000 hour(s)

Product Data


Order product name	DN027B G3 LED20/CW 19W 220-240V D200 RD
Full product name	DN027B G3 LED20/CW 19W 220-240V D200 RD
Full product code	871951434524900
Order code	929002674738
Material Nr. (12NC)	929002674738
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514345249
Numerator - Packs per outer box	24
EAN/UPC - Case	8719514345256

Dimensional drawing

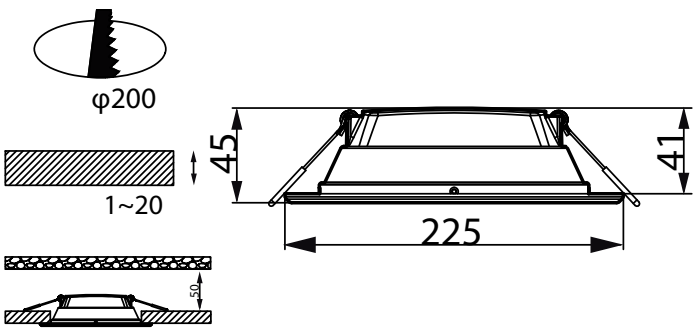


Essential SmartBright LED Downlight


Photometric data



Light Distribution Diagram - DN027B G3 LED20/CW 19W 220-240V D200 RD



General uniform lighting - DN027B G3 LED20/CW 19W 220-240V D200 RD



Light Distribution Diagram - DN027B G3 LED20/CW 19W 220-240V D200 RD

© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.