Product datasheet

Specifications



Switched socket with USB charger, Avataron, 21W type A+C, 13A, White

E8715DACUSB_WE

Main

Range	AvatarOn
Product or component type	Switched socket with USB charger
Device presentation	Complete product
Socket additional information	Shuttered
Type of packing	Plastic bag
Quantity per set	1
Sale per indivisible quantity	1

Complementary

Socket number	1
Device mounting	Flush 29 mm
Switch function	ON/OFF power-socket outlet
Number of power socket outlets	1 x 2P + E, BS 1363
Rated current	13 A 220...250 V, AC, 50/60 Hz
Surface finish	Brilliant
surface treatment	Untreated
Number of gangs	1 gang
Connector type	USB type A USB type C
[Ue] rated operational voltage	220...250 V AC 50/60 Hz
Power consumption in W	21 W
Integrated connection type	2 USB port 5 V DC
Material	PC (polycarbonate): body and cover
Protection type	Over temperature protection Overload protection
Shape of screw head	Cross slotted
Screwdriver shape	Phillips combined
Electrical connection	3 3 screw terminals (indoor use)
Clamping connection capacity	1 x 2.5...1 x 4 mm² for rigid or stranded cable(s)
Wire stripping length	10…12 mm
Mounting support	Wall box conforming to BS 1361
Fixing mode	By 2 screws M3.5 x 25 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

fixing center	60.3 mm
Height	86 mm
Width	86 mm
Depth	42 mm
Embedding depth	32 mm

Environment

Operating altitude	0...2000 m
Ambient air temperature for operation	0…35 °C
Ambient air temperature for storage	0…55 °C
Relative humidity	0…90 %
Standards	BS 1361
Product certifications	IEC
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.1 cm
Package 1 Width	8.6 cm
Package 1 Length	8.6 cm
Package 1 Weight	140.3 g
Unit Type of Package 2	BB1
Number of Units in Package 2	8
Package 2 Height	9.3 cm
Package 2 Width	12.5 cm
Package 2 Length	26.5 cm
Package 2 Weight	1.2024 kg
Unit Type of Package 3	CAR
Number of Units in Package 3	72
Package 3 Height	29.2 cm
Package 3 Width	29.8 cm
Package 3 Length	39.8 cm
Package 3 Weight	11.5216 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**148**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant with Exemptions**
REACh Regulation	**REACh Declaration**
Halogen-free status	**Halogen free plastic parts product**

Use Again

Repack and remanufacture


End of life manual availability	**End of Life Information**
Take-back	**No**

Image of product / Alternate images

Alternative





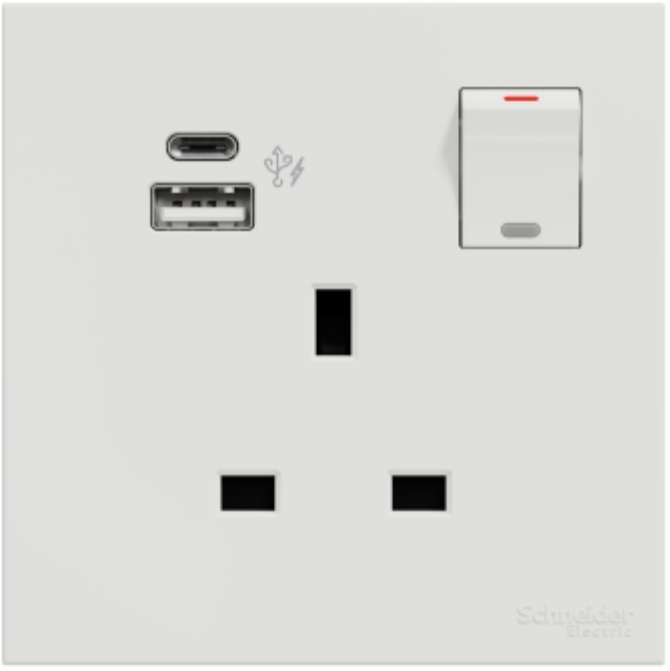




L
N
13A 250V~
BS1363
SASO2203
MS589
SS145
MADE IN CHINA



